



NEOTECMAN

HV205.32


BRASS HOT FORGING PROCESS

HYDRAULIC PRESS / PRESSA IDRAULICA

- No flash
- Senza bave

FURNACE / FORNO

- Compact system
 - Saves space
 - Intergrated in the process
 - No direct flame
 - Adjustable billet (during production)
 - Progressive heating
- Sistema compatto
 - Risparmio di Spazio
 - Integrato nel processo
 - Senza fiamma diretta
 - Tassello (billetta) regolabile (durante il processo)
 - Riscaldamento progressivo

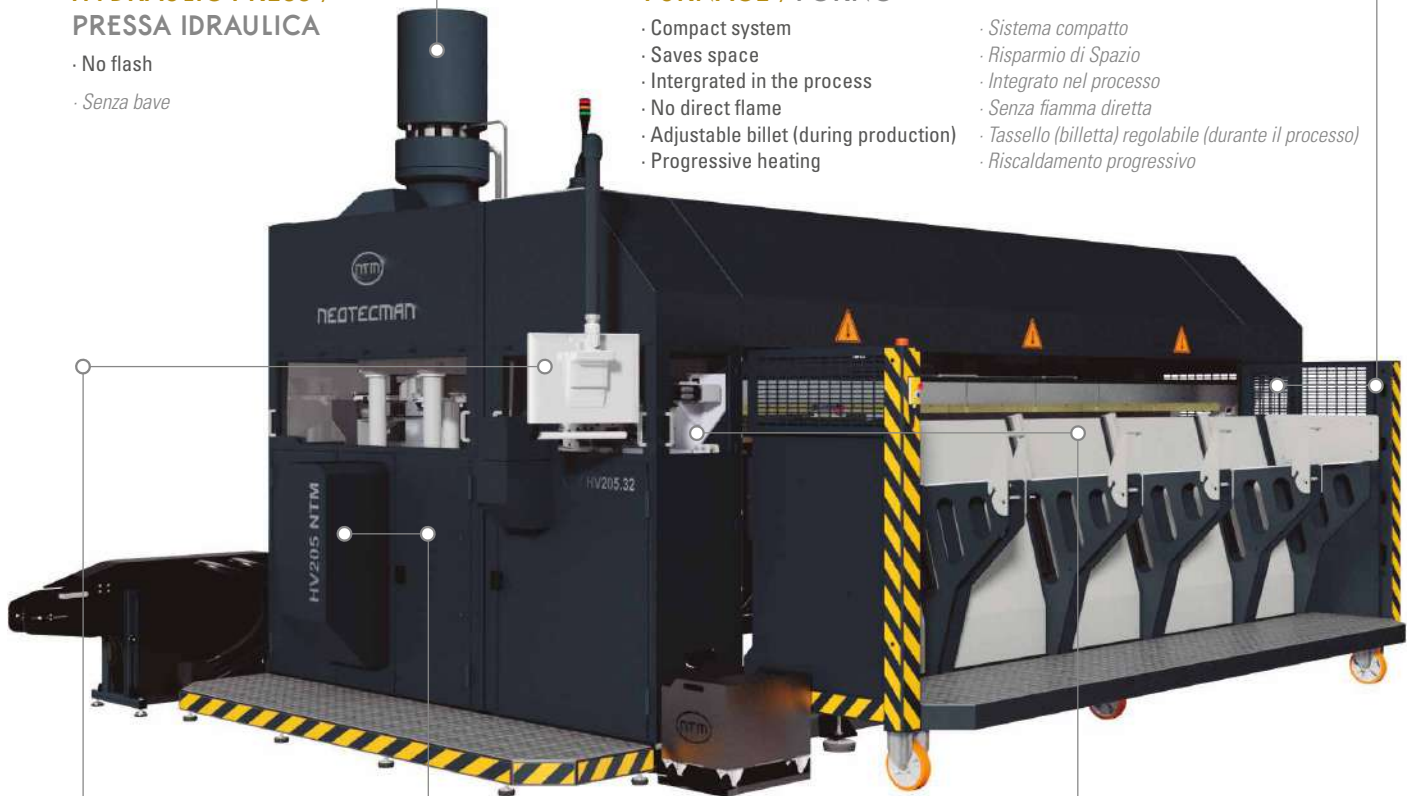

TOUCH SCREEN/ PANNELLO TOUCH

- Functional configuration
- Configurazione funzionale

PUNCH MOVEMENTS CONTROL / CONTROLLO DEL MOVIMENTO DELLE SPINE

- Adjustable features (during production)
 - Speed (in&out)
 - Time (in&out)
 - Main pressure
- Caratteristiche modificabili (durante la produzione)
 - Velocità (di ingresso ed uscita)
 - Tempo (ingresso ed uscita)
 - Pressione principale

CUTTING SYSTEM / SISTEMA DI TAGLIO

- No shavings
 - Compact cutting
 - Adjustable billet cutting (during production)
- Senza trucioli
 - Sistema integrato
 - Possibilità di regolare l'altezza della billetta/tassello (durante la produzione)

1 BRASS
OTTONE

2 ALUMINIUM
ALLUMINIO

3 COPPER
RAME



MINIMUM 12 mm \varnothing MAXIMUM 32 mm



in

C/ PUJOLS, PARCEL·LA B-27 POL. IND. CELRA - 17460 CELRA - GIRONA - SPAIN

+34 972 494 070 - INFO@NEOTECMAN.COM

WWW.NEOTECMAN.COM

TECHNICAL SPECIFICATIONS

SPECIFICHE TECNICHE

HV205.32



DESCRIPTION AND BENEFITS DESCRIZIONE E VANTAGGI

Fully automated and compact process: furnace + cutting system (shavings-free) + hydraulic press with no flash, 5 independent punches (4 horizontal + 1 vertical)

BAR RANGE / BARRE

From Ø 12 mm to Ø 32 mm and up to 4 m (length).

ELECTRICAL SYSTEM SISTEMA ELETTRICO

Voltage	3 ~ 400 V 50 Hz 3 ~ 460 V 60 Hz
Max. power supply	95 kW
Hardware	21" touch-screen, EMBEDDED industrial PC, PLC control

PRODUCTION CAPACITY CAPACITÀ PRODUTTIVA

Production	Up to 4.000 items/hour
Bar diameter	From 12 to 32 mm
Bar length capacity	Up to 4.000 mm
Minimum weight	15 g/piece
Maximum weight	1.200 g/piece
Bar length	Up to 200 mm

HYDRAULIC SYSTEM SISTEMA IDRAULICO

Ram closing force	100 t
Main motor power	75 kW
Max. operating pressure	280 bar
Hydraulic tank capacity	650 L
Graphite oil tank capacity	50 L

PARTS THAT CAN BE PRODUCED PEZZI CHE POSSONO ESSERE PRODOTTI

From 1 to 4 pieces/cycle. Bushings, nuts, hose unions, sockets (f/m), female caps, reducing nipples, plugs, short pipes, end pipes, propeller nuts...

MATERIALS / MATERIALI

Brass, lead-free brass, copper, red brass, and aluminum.

FURNACE CAPACITY CAPACITÀ DEL FORNO

Energy source	Propane gas Methane gas Natural gas
Max. installed capacity	200.000 kcal/h
Consumption	From 50.000 to 200.000 kcal/h
Operating pressure	40 mbar
Max. capacity	700 kg/h at 700°C

WEIGHT AND DIMENSIONS PESI E DIMENSIONI

Empty weight	15.700 kg
Total height	3.755 mm
Total height with candle filter	4.155 mm
Total length	6.372 mm
Total width	3.240 mm
Total width with loader	4.217 mm

NOTE: specifications according to EC standards



in

C/ PUJOLS, PARCEL·LA B-27 POL. IND. CELRA - 17460 CELRA - GIRONA - SPAIN

+34 972 494 070 - INFO@NEOTECMAN.COM

WWW.NEOTECMAN.COM